

1	Executive Summary	3
2	Introduction	6
3	Background and Evolution of the <b>Spherical</b> Bearing	10
4	<b>Spherical</b> Bearing Geometry Analysis and Advantages	15
5	Materials	21
6	Testing and Verification	23
7	<b>Spherical</b> Bearing: Minimum Failure Rate	27
8	<b>Spherical</b> Bearing Performance	29
9	Conclusions	32
10	Competitive Advantages of Trina <b>Tracker</b>	34
11	State-of-the-Art Engineering Solutions	37
12.	+6 GW of Solar Installations	39

Trina Tracker  
Aerobic  
Lr Grí  
J C  
Mr G  
A dr G oo APACB





# 1



The correct position of the components of the tracker to be able to track the sun correctly



Deformations and deflections caused in the poles during their installation



Cost of Balance of System will include the cost of the hardware (and software, if applicable), labour, permitting Interconnection and Inspection (PII) fees, and any other fees that may apply. For large commercial solar systems, the cost of BOS may include the cost of land and building, etc. The cost of BOS can be about two thirds of the total cost.



Cermak Peterka Petersen, Inc.



Det Norske Veritas



Engineering, Procurement and Construction



Finite Element Method



A process that protects against corrosion



Reinforcements on the inside of the plastic parts

Levelized Cost of Energy (LCOE), or Levelized Cost of Electricity, is a measure of the average net present cost of electricity generation for a generating plant over its lifetime



An exceptional metallic coating that provides a breakthrough in corrosion protection




Mean Time Before Failures



Operation and Maintenance



Post rammed into the ground



A method for obtaining plastic parts by injecting plastic into a mould



Photovoltaic



The loads on the bearing from the centre of the bearing in the direction of the radius



Research and Development



Return on Investment (ROI) is a performance measure used to evaluate the efficiency or profitability of an investment or compare the efficiency of several different investments



Rowan Williams Davies & Irwin Inc.



The profile that rotates along with the sun allowing tracking of the sun

Bank for International Settlements (BIS) and the International Energy Agency (IEA) estimated that between now and 2050, 77% of investments in new power generation will be in renewables.

Specifically, utility-scale photovoltaic energy has become an attractive investment area since installation and interconnection times are short, and it involves low risk, since energy production can be easily predicted.

The reliability of solar power plants depends on how accurately the solar trackers can follow the course of the sun. The more precisely these solar systems operate, the more efficient and the more profitable the plants will, therefore, be.

The quality of solar trackers is the key to making PV projects reliable assets. Moreover, the success of projects is mostly evaluated by the quality of system components.

Therefore, bearings make an important contribution here since they are critical for the reliability and cost effectiveness of the solar power plant. These components must have high rigidity and high load-carrying capacities even when operating under extreme conditions.

Trina's R&D is continuously developing improvements in the quality and design of all components in the trackers, thus increasing their reliability, and decreasing failure rates.

The company strives to be at the forefront of innovation and technology and its patented technology, which is unique in the photovoltaic market, is a result of its endeavour to maintain its positioning as a leader in the solar industry.

Trina offers long-lasting reliable products that achieve optimized production, and increase the life expectancy of the installation while reducing cost and risk to provide maximum value to their customers.






Regarding solar trackers, the design optimization of any component can contribute to achieving a more accurate rotation movement to follow the sun and capture most of the existing radiation in a particular site.

When it comes to innovation and technology, [TrinaTracker](#), is always.

The company works non-stop to better its design and offer trackers that include the most innovative components. Many of the components are [patented](#), like the patented "[TrinaTracker](#)".


In general terms, a bearing is an element that allows the rotation of a torque tube on a fixed part or structure.

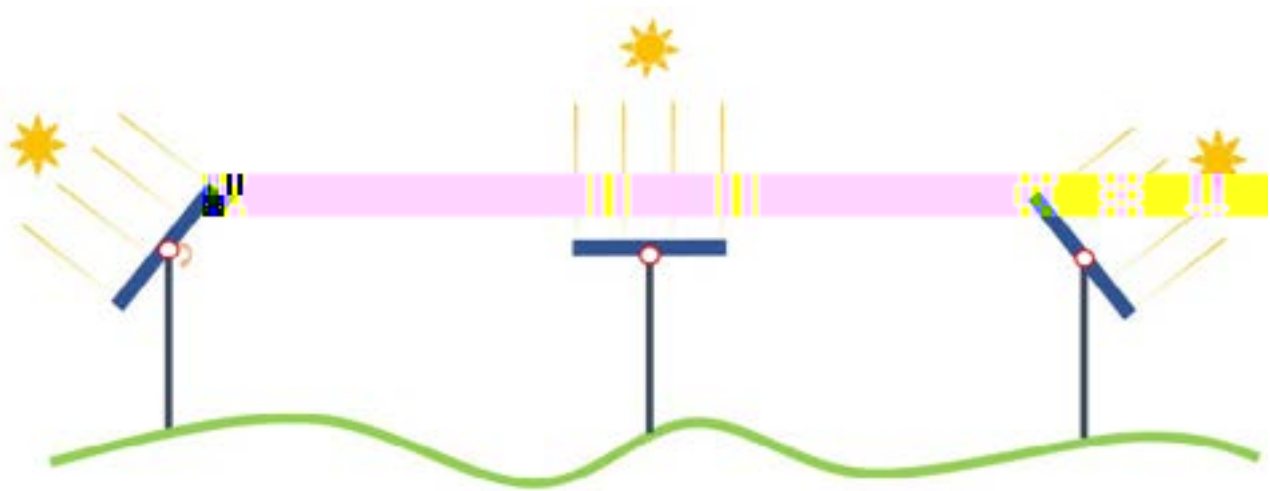


1 Tracker rotation

The use of bearings in the photovoltaic sector arises from the need to make a semi-fixed structure that allows for tracking the sun's position to take advantage of solar energy throughout the sun's cycle.

The bearing assembly is one of the main parts of a tracker. Apart from being the component that allows the torque tube to rotate (and therefore the tracking of the sun), it is the element that must withstand high vertical, horizontal, and axial loads, and therefore it will have to withstand high vertical, horizontal, and axial loads.

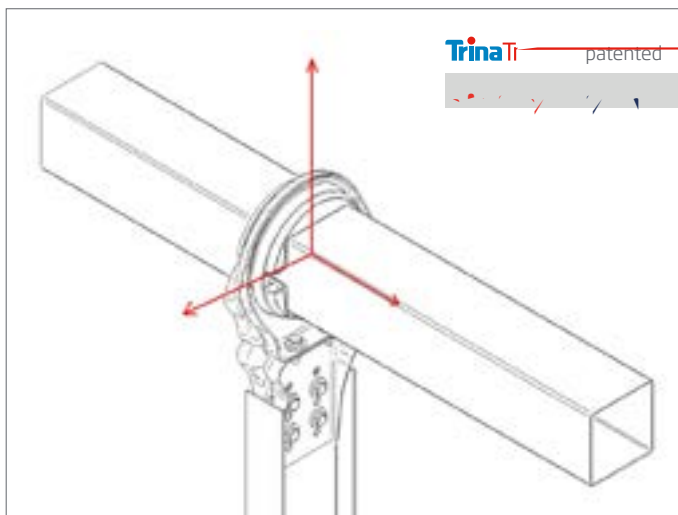

Vertical, horizontal, and axial loads




Tolerance on post twist

Without bearings, a single-axis tracker would only be a fixed structure. A good bearing design will allow for optimal tracking, minimizing energy losses due to friction. It will also allow for the tracking of the sun and the generation of energy from the driving in of the posts.





1 r b r rotation

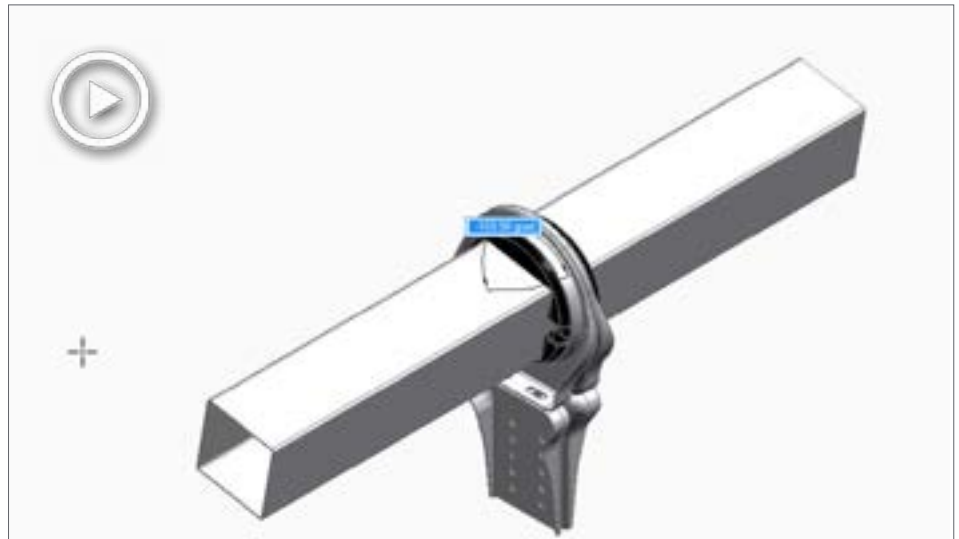

1 r b r rotation







The first bearing design was cylindrical. In the first assembly of a test tracker, the problems of assembly and alignment became apparent.

Initially, all bearings were, and still are cylindrical; however, the R&D Department has gone a step further, and after analysing and testing the installation and operation of the trackers with bearings installed, the team discovered that there was still room for improvement.



When the R&D Department installed the cylindrical bearings in testing tracker samples, they identified specific issues related to the mechanical operation, derived from the mechanical operation.

The use of cylindrical bearings meant adding an extra difficulty in the alignment of the trackers since they can overcome neither the bends of the poles nor the irregularities of the ground.

Alignment is a crucial process for the trackers during the assembly process since the proper functioning of the tracker depends on a precise alignment.



Trina Tracker installed in Habei, China, 400 MW


After the performance and testing of different bearings,  designed and implemented a spherical geometry for these elements. The component, through its , rather than two-dimensional axial movement, provided such significant added value, easing and lowering risk to the tracker installation that the company decided to patent the product.

  **Trina**  installed in Habei, China, 400 MW

Model	Number	Name	Status	Application Date	Deadline	Payment	Classification	Country	Drawings
European Patent	<a href="#">EP2735817A3</a> <a href="#">EP2735817A2</a>	Swivel mount for solar tracker shafts	Granted	22/11/2013	30/11/2020	9 <sup>th</sup> annuity	F16C11/06; F24J2/52; F24J2/54; F16C23/04	DE IT ES	
European Patent	<a href="#">EP2735817B1</a> <a href="#">EP2735817B8</a>	Soporte giratorio de ejes de seguidores solares Swivel mount for solar tracker shafts	Granted	22/11/2013	30/11/2020	8 <sup>th</sup>			

 **Trina**  **Trina**  patents

This **new bearing design** helps the alignment of the tracker, as it aligns itself. As a result, it **reduces the need for civil works** for EPC companies (including reduction in civil works and cut and fill costs and risks) and improves the trackers' unimpeded operation in service.

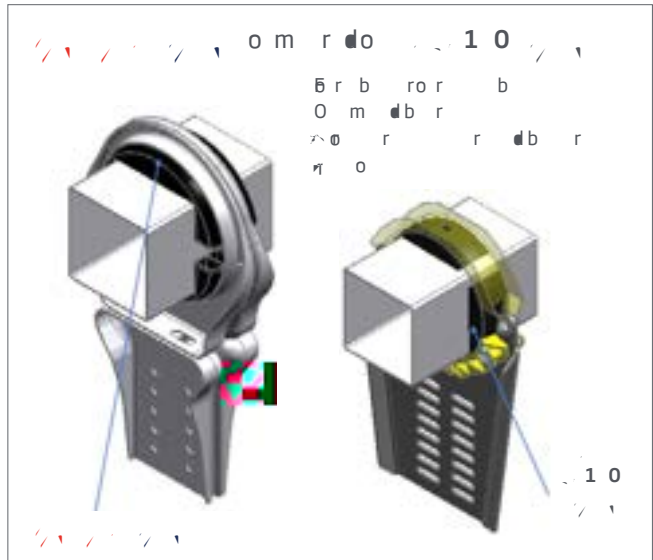

**Lower bearing assembly in rd 2P**

**Evolution of bearing**

The new bearing design makes the joints more efficient; therefore, **it reduces the need for civil works**.


The joint of the lower bearing support to the W post is designed with **solid holes** instead of slotted holes. This restricts movement associated with long term settlement and accordingly improves durability.

The component is made of UV stable and hard-wearing polyamide with fiberglass, which allows for the rotation axis to slide while **maintaining alignment** when trackers move.

Since the adoption of this type of geometry, the **new bearing design** became a critical element of the company's trackers. The bearing design has been in continuous **improvement**, adapting to the different characteristics of **rd 1** and **rd 2P** and innovating in materials, both in plastics and metallic housings.

The evolution of the bearing is going hand in hand with the development of the trackers, keeping up with the latest updates and optimization of the tracker industry in terms of

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

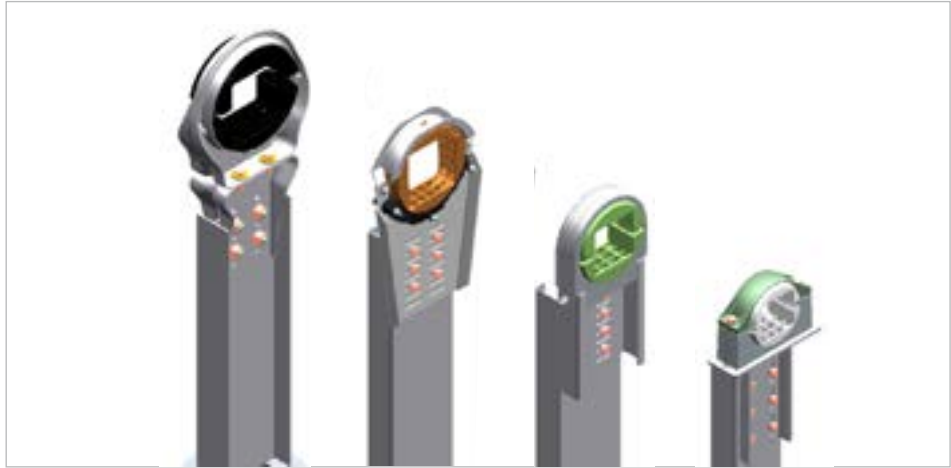

Different bearing designs

	1	2
	PA66+GF30	S420GD
	S420GD (excellent thermal performance & UV resistant)	
	POM (Excellent at self-lubrication, Hydrolysis resistance, stability of size in different temperatures, UV resistant)	
	Designed to be installed in different type of piles	
	Flexible assembly (Split design)	Rigid assembly (robust design)
	Adapted for 100, 120 mm torque tube	Adapted for 170 mm torque tube
	Tilted stow position and high horizontal loads	Extremely high mechanical strength

Differences between 1 and 2's bearing



TrinaTracker patented

1 bearing

10 bearing




TrinaTracker has patented the , and therefore, it is unique to the  and,  1 series. The rest of the trackers available in the market employ cylindrical bearings.



 11 1 Example of a commercial cylindrical bearing



The bearing structure is very simple at a first sight. It is comprised of two parts: the "housing," or fixed part, and the "Sphere" or moving part.




 1 Housing (fixed part)

 1 Sphere (moving part)



TrinaTracker patented  can move around the three axes of rotation. This type of bearing has worked efficiently for  during the operation phase of trackers. The split feature of the bearing enables expedient installation of the torque tubes into the bearing assembly before the other bearing half and cap are assembled.

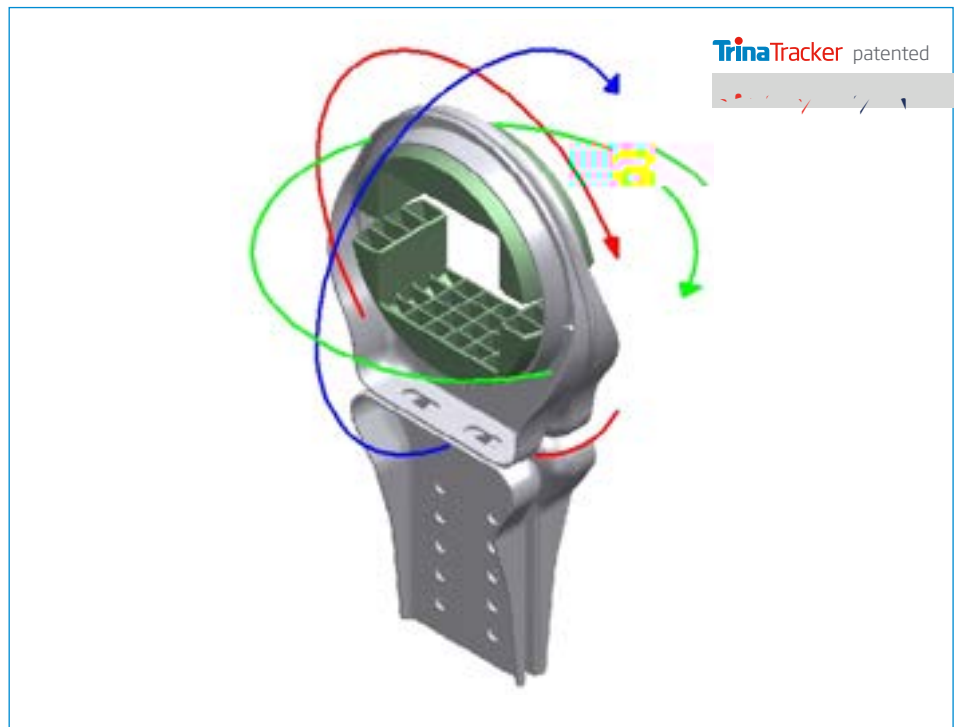

**1** Three-axis rotation




**TrinaTracker** patented


1 A b o r o o r o o r o

The torsion in the "Z" axis (longitudinal axis of the post) keeps the sphere inside the housing (cavity) and therefore maintains its ability to


Installing cylindrical bearings would likely result in twisted posts. This effect is avoided by assembling

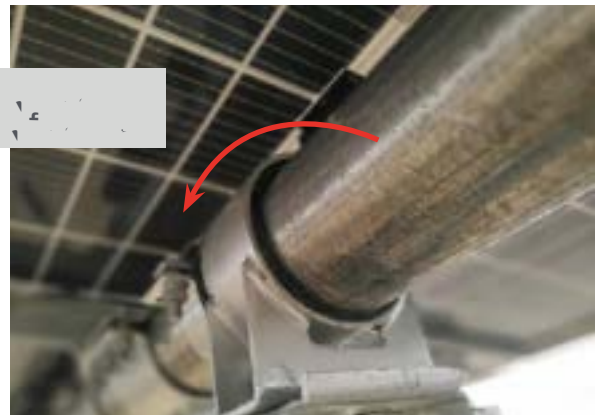

1 Cylindrical bearing structure

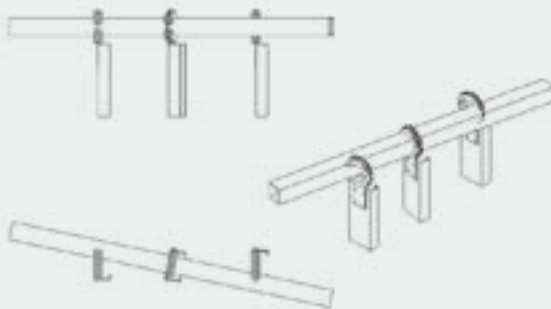




1 Misalignment with cylindrical bearings on twisted post

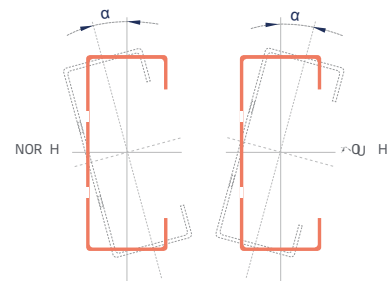


1 Twist tolerance

## Abbraccio

In , the bearing geometry can rotate by itself requiring without making extra adjustments or adding elements to the bearing.

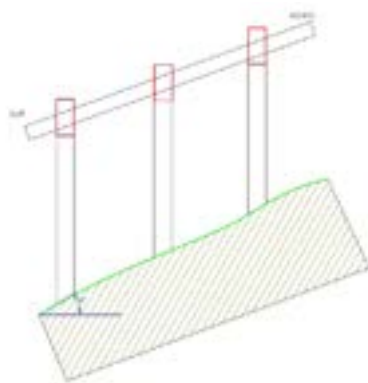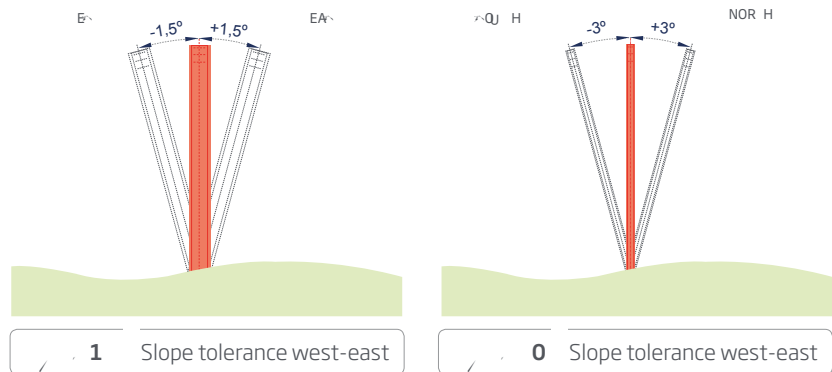


**1**       installed in N-S slope

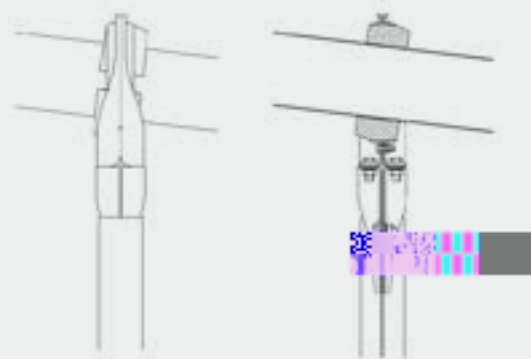

     performance when installed in N-S slope

Since the cylindrical bearings are typically larger, heavier, more difficult to mount, and require more substantive housings, they become disadvantageous when achieving perfect alignment.

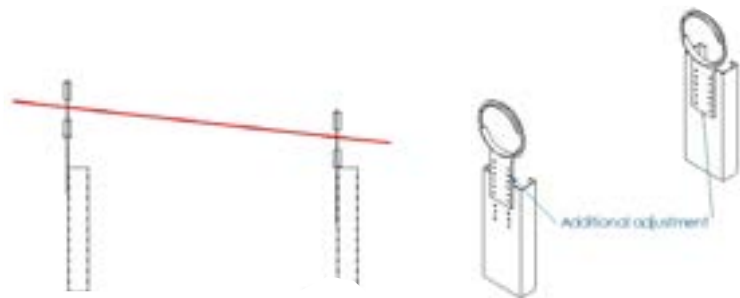

Cylindrical bearing performance when installed in N-S slope

Pr o o r b r o m b r o ( ) d o  
d o o r o d o r o d .

The spherical geometry of the housing interface with the other spherical elements (the balls) prevents the latter from coming out of the bearing from disassembling itself during the operation.



Front view of r b r cut in half

R m b o o d

This happens due to the same reason mentioned in the previous point.

o r r o m r

Being... eases the assembly process of the tracker.

r b r installed in r 2P

50% r d o o r m b m d o

The... allows a reduction of at least 0% of each post, resulting in a considerable reduction of the overall installation time.


Nb r r k r	13	13
m r b r ( )	0.43	0.86
o m r b r ( )	0	5.59
m r r k r ( )	31.75	37.34
m r		15%
m r M	412.75	485.42
r m r M ( )		72.67
o d		9.08



Reduction of assembly time



Time and cost savings

Besides time reduction, ... also contribute to a lower LCOE. For example, when assembling ... instead of cylindrical bearings in a standard tracker, the BOS cost is reduced by 0.029 \$ per Wp and assembly times decrease by 15 %.

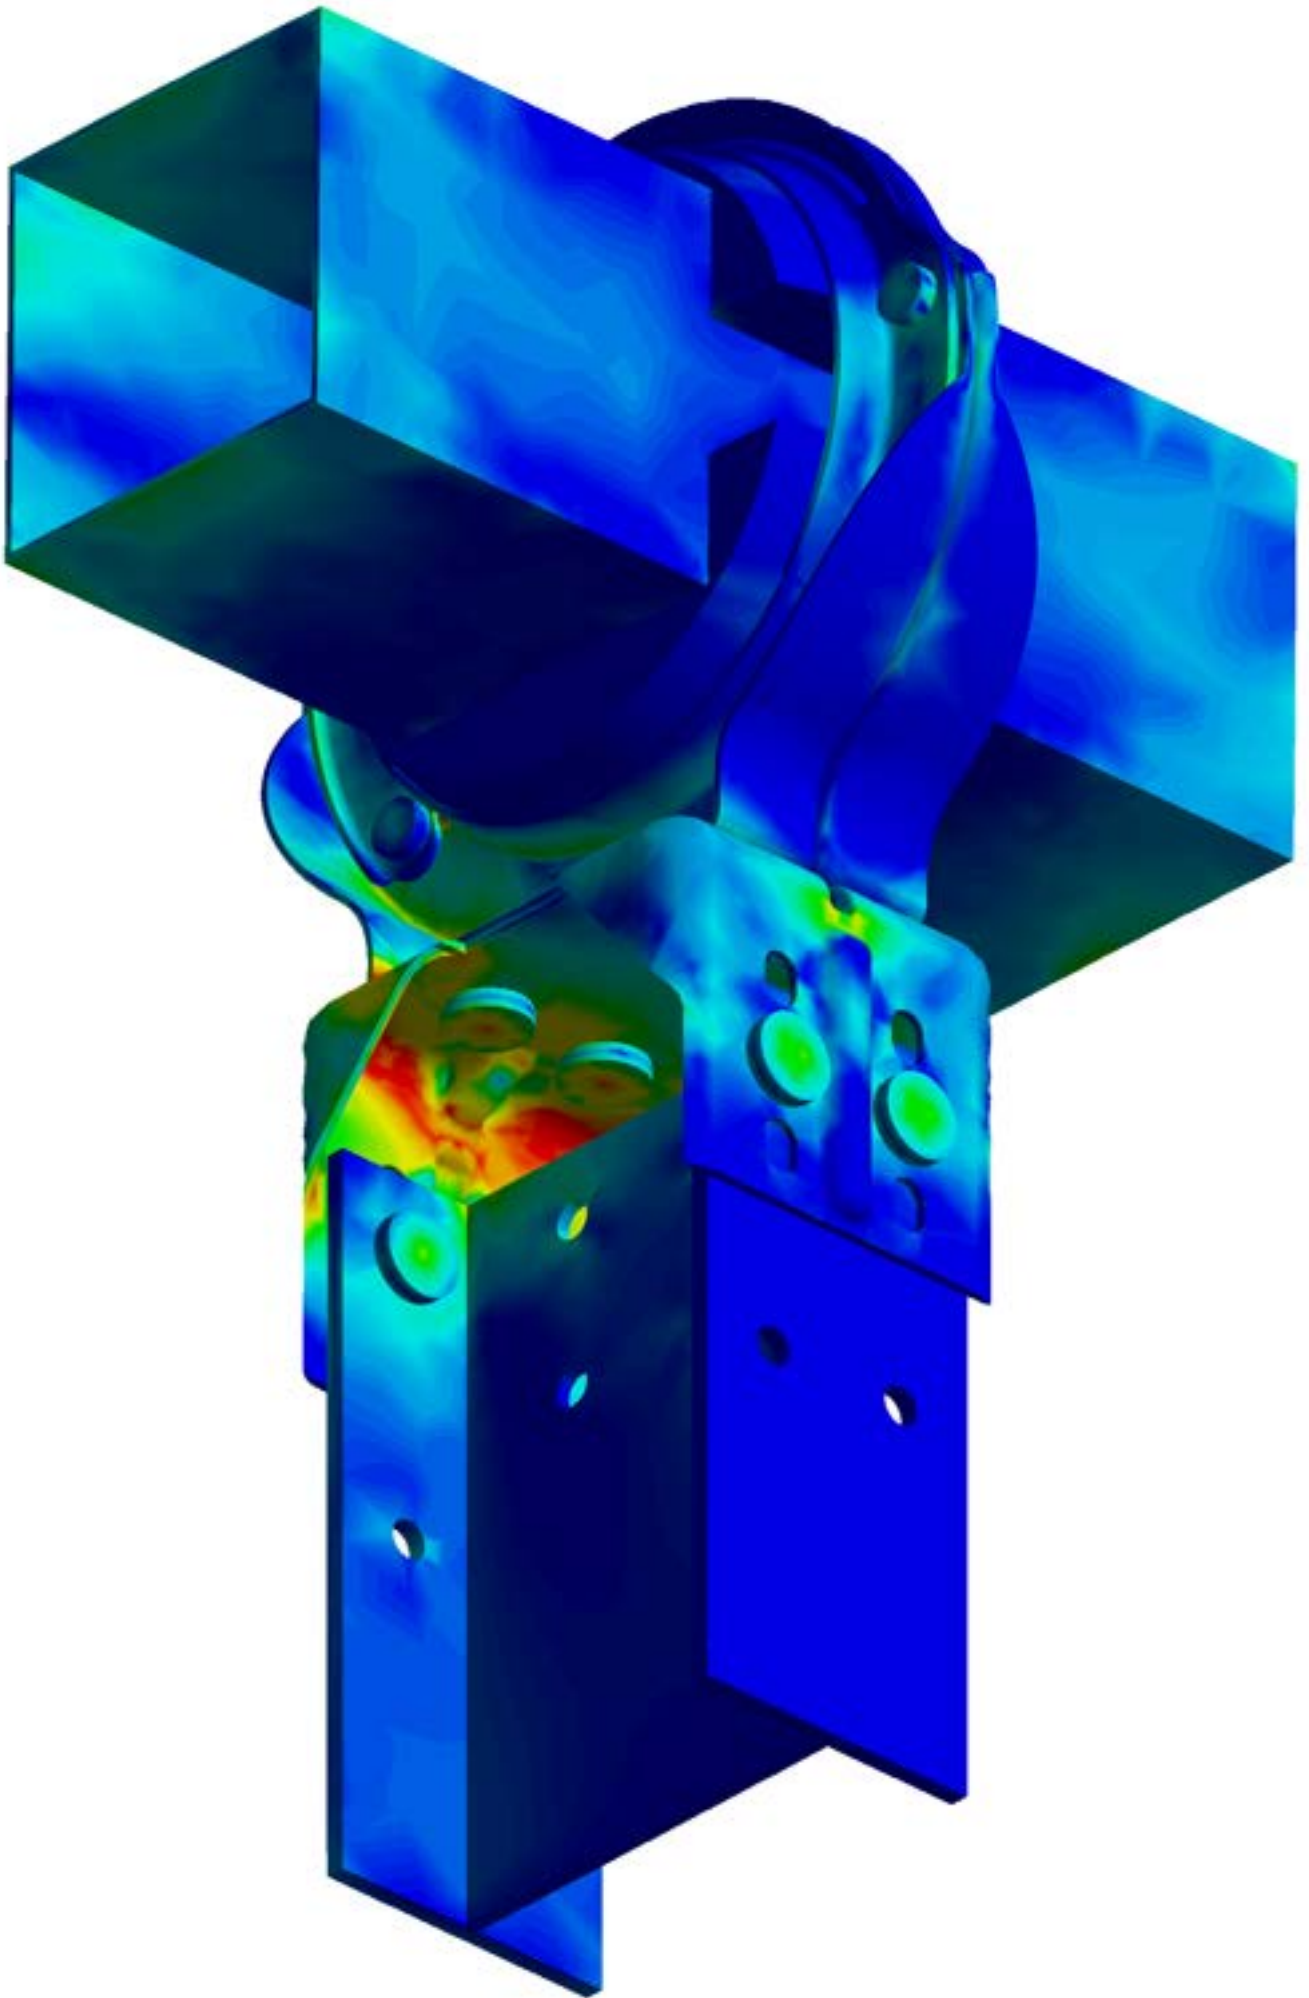






Each type of bearing is configured to withstand the maximum loads for which the tracker is designed.


The maximum radial and axial loads for bearings are evaluated and defined for subsequent projects by the R&D team.

The geometry of the bearings allows high resistance to radial loads (vertical and horizontal) and axial loads due to the ball's spherical shape.

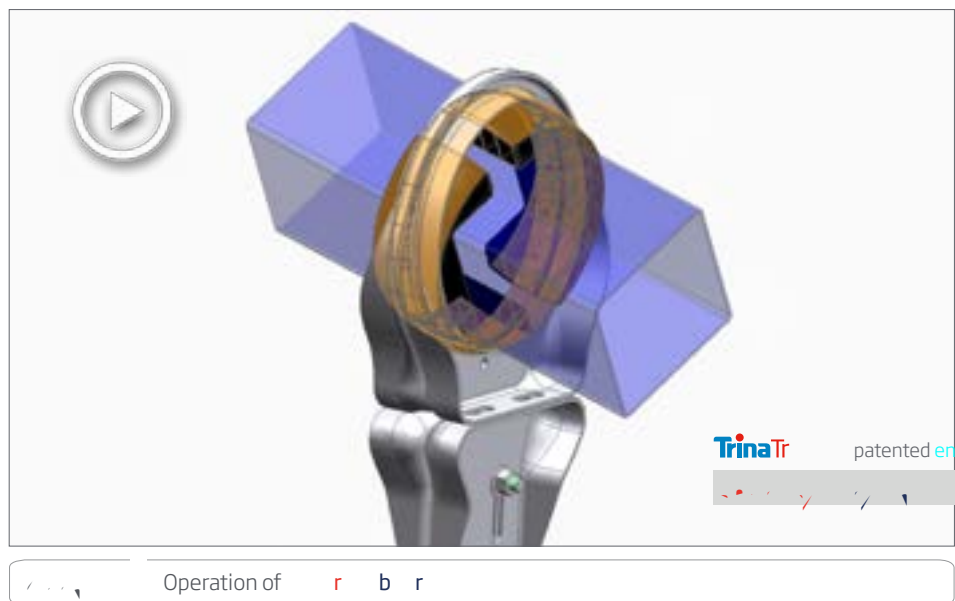


Simulation analyses are carried out on each model using the resulting loads to evaluate their structural adequacy under ultimate loads and optimize and check the geometry according to the plastic properties in the injection of the material.



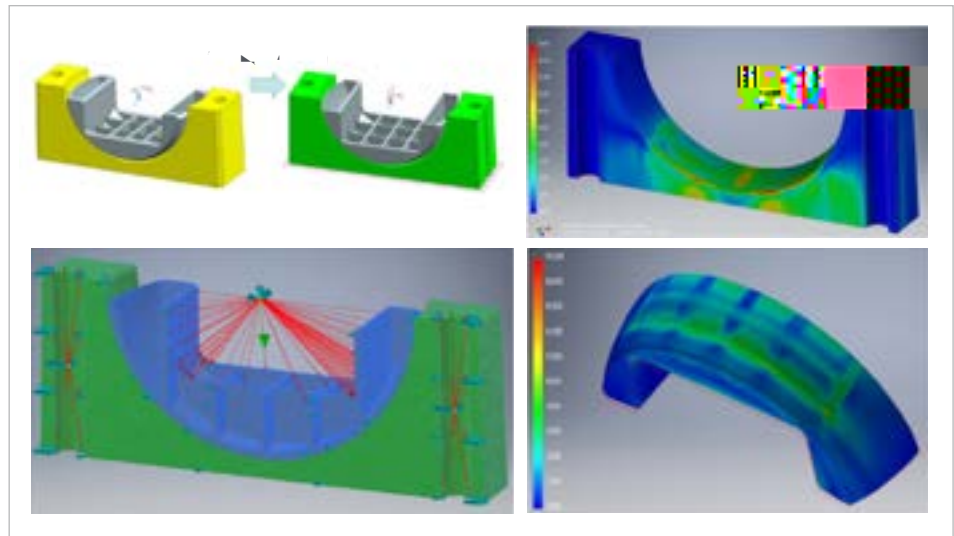

Optimizing calculation of plastic part of bearing component

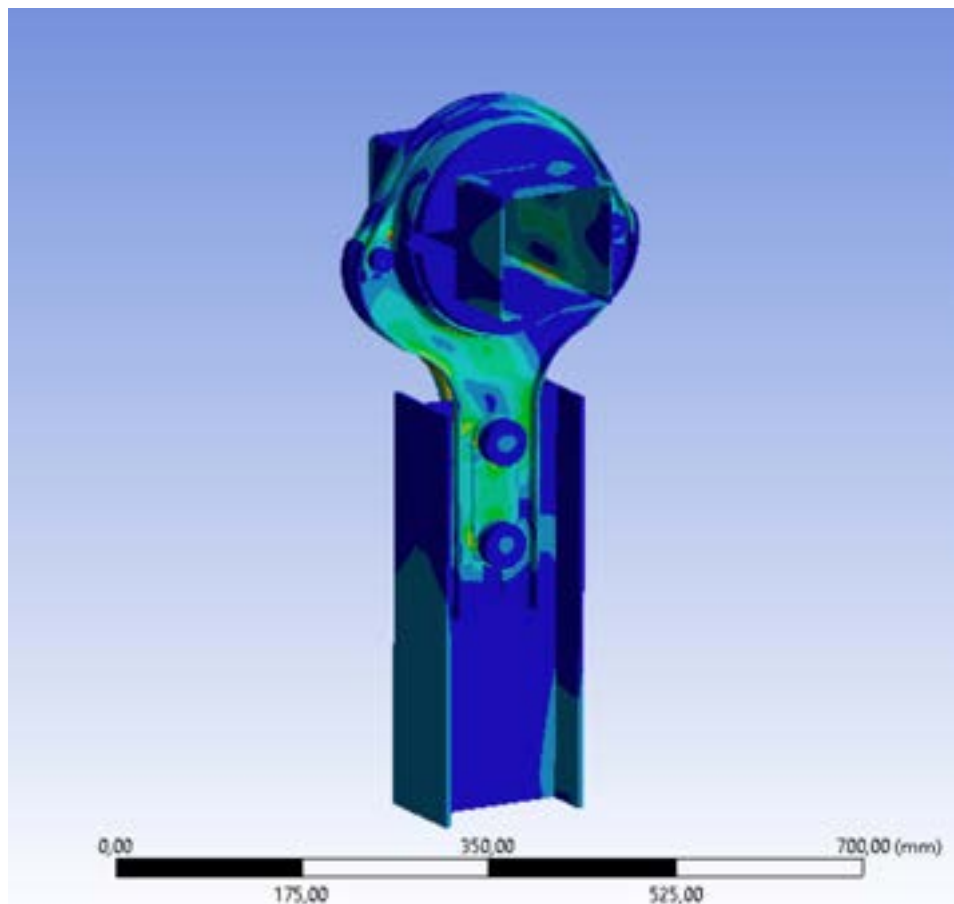

FEM calculation sample

Load tests are performed at in-house facilities or external facilities to evaluate the maximum mechanical load to which the bearings can be subjected to.



0 bearing testing



1 bearing testing



15 bearing testing



1225 bearing testing

The tests are carried out following the EN1990: 2002. This regulation establishes a system of repetition of assessments to come at the resistance values of the union employing a statistical calculation.





Trina Tracker report hardly any failure rate during the whole operation phase of the plant. Therefore, the installation of this component contributes to a reduction of operation and maintenance costs and tasks, providing a significant benefit to Trina Tracker's clients.

The failure rates shown below are reported for 1 and 2P.

Year	Component	Number of Failures (N°)	Number of Units (N°)	Mean Time to Repair (m)	Mean Time to Replace (r)	Failure Rate (%)	Operational & Maintenance Impact (r/yr)
5 years	Bearing	16.0	25.520	15	0.25	0.0250%	1.60

Failure rate in 1P

Year	Component	Number of Failures (N°)	Number of Units (N°)	Mean Time to Repair (m)	Mean Time to Replace (r)	Failure Rate (%)	Operational & Maintenance Impact (r/yr)
5 years	Bearing	8.2	13.317	120	2.00	0.0250%	6.66

Failure rate in 2P

\* Data gathered from Trina Tracker data base



## Zuera 11 MW: Spherical bearings' excellent and long-lasting performance

The **Zuera 11 MW** is an 11MW PV plant installed in Zaragoza, Spain. Since its interconnection in 2008, no failure ratio has been reported, therefore the installation has become an example of **Trina Tracker's** excellent and long-lasting performance.

It was in **Zuera** where the first **Trina Tracker's** were assembled in trackers, and nearly **100,000** **Trina Tracker's** have passed with no instances of suboptimal actuation.



**Spherical bearing** installed in Zuera 11 MW, Zaragoza



**Zuera 11 MW, Zaragoza**

## Tongchuan, 30 MW: Spherical bearings' efficiency in uneven terrain

Tongchuan is a 250 MW plant installed in China. The project is divided into two parts: 30 MW with TrinaPro and 220MW with fixed tilt racking system.


Surrounding mountains decreased site accessibility to both construction crews and materials. The uneven terrain added one more challenge to the plant design and installation.

TrinaTracker employed adjustable bearing supporting structure along with flexible racking system and reduced number of piles per tracker to alleviate construction complexity in this project, expediting the installation process.

Tongchuan project, which trackers have all spherical bearings assembled, achieve 3.5% better LCOE, brings 7.75% more generation output and 0.6% better IRR than fixed tilt structure. The results reinforce our confidence in our products and services for our customers worldwide.



Tongchuan 250 MW, China

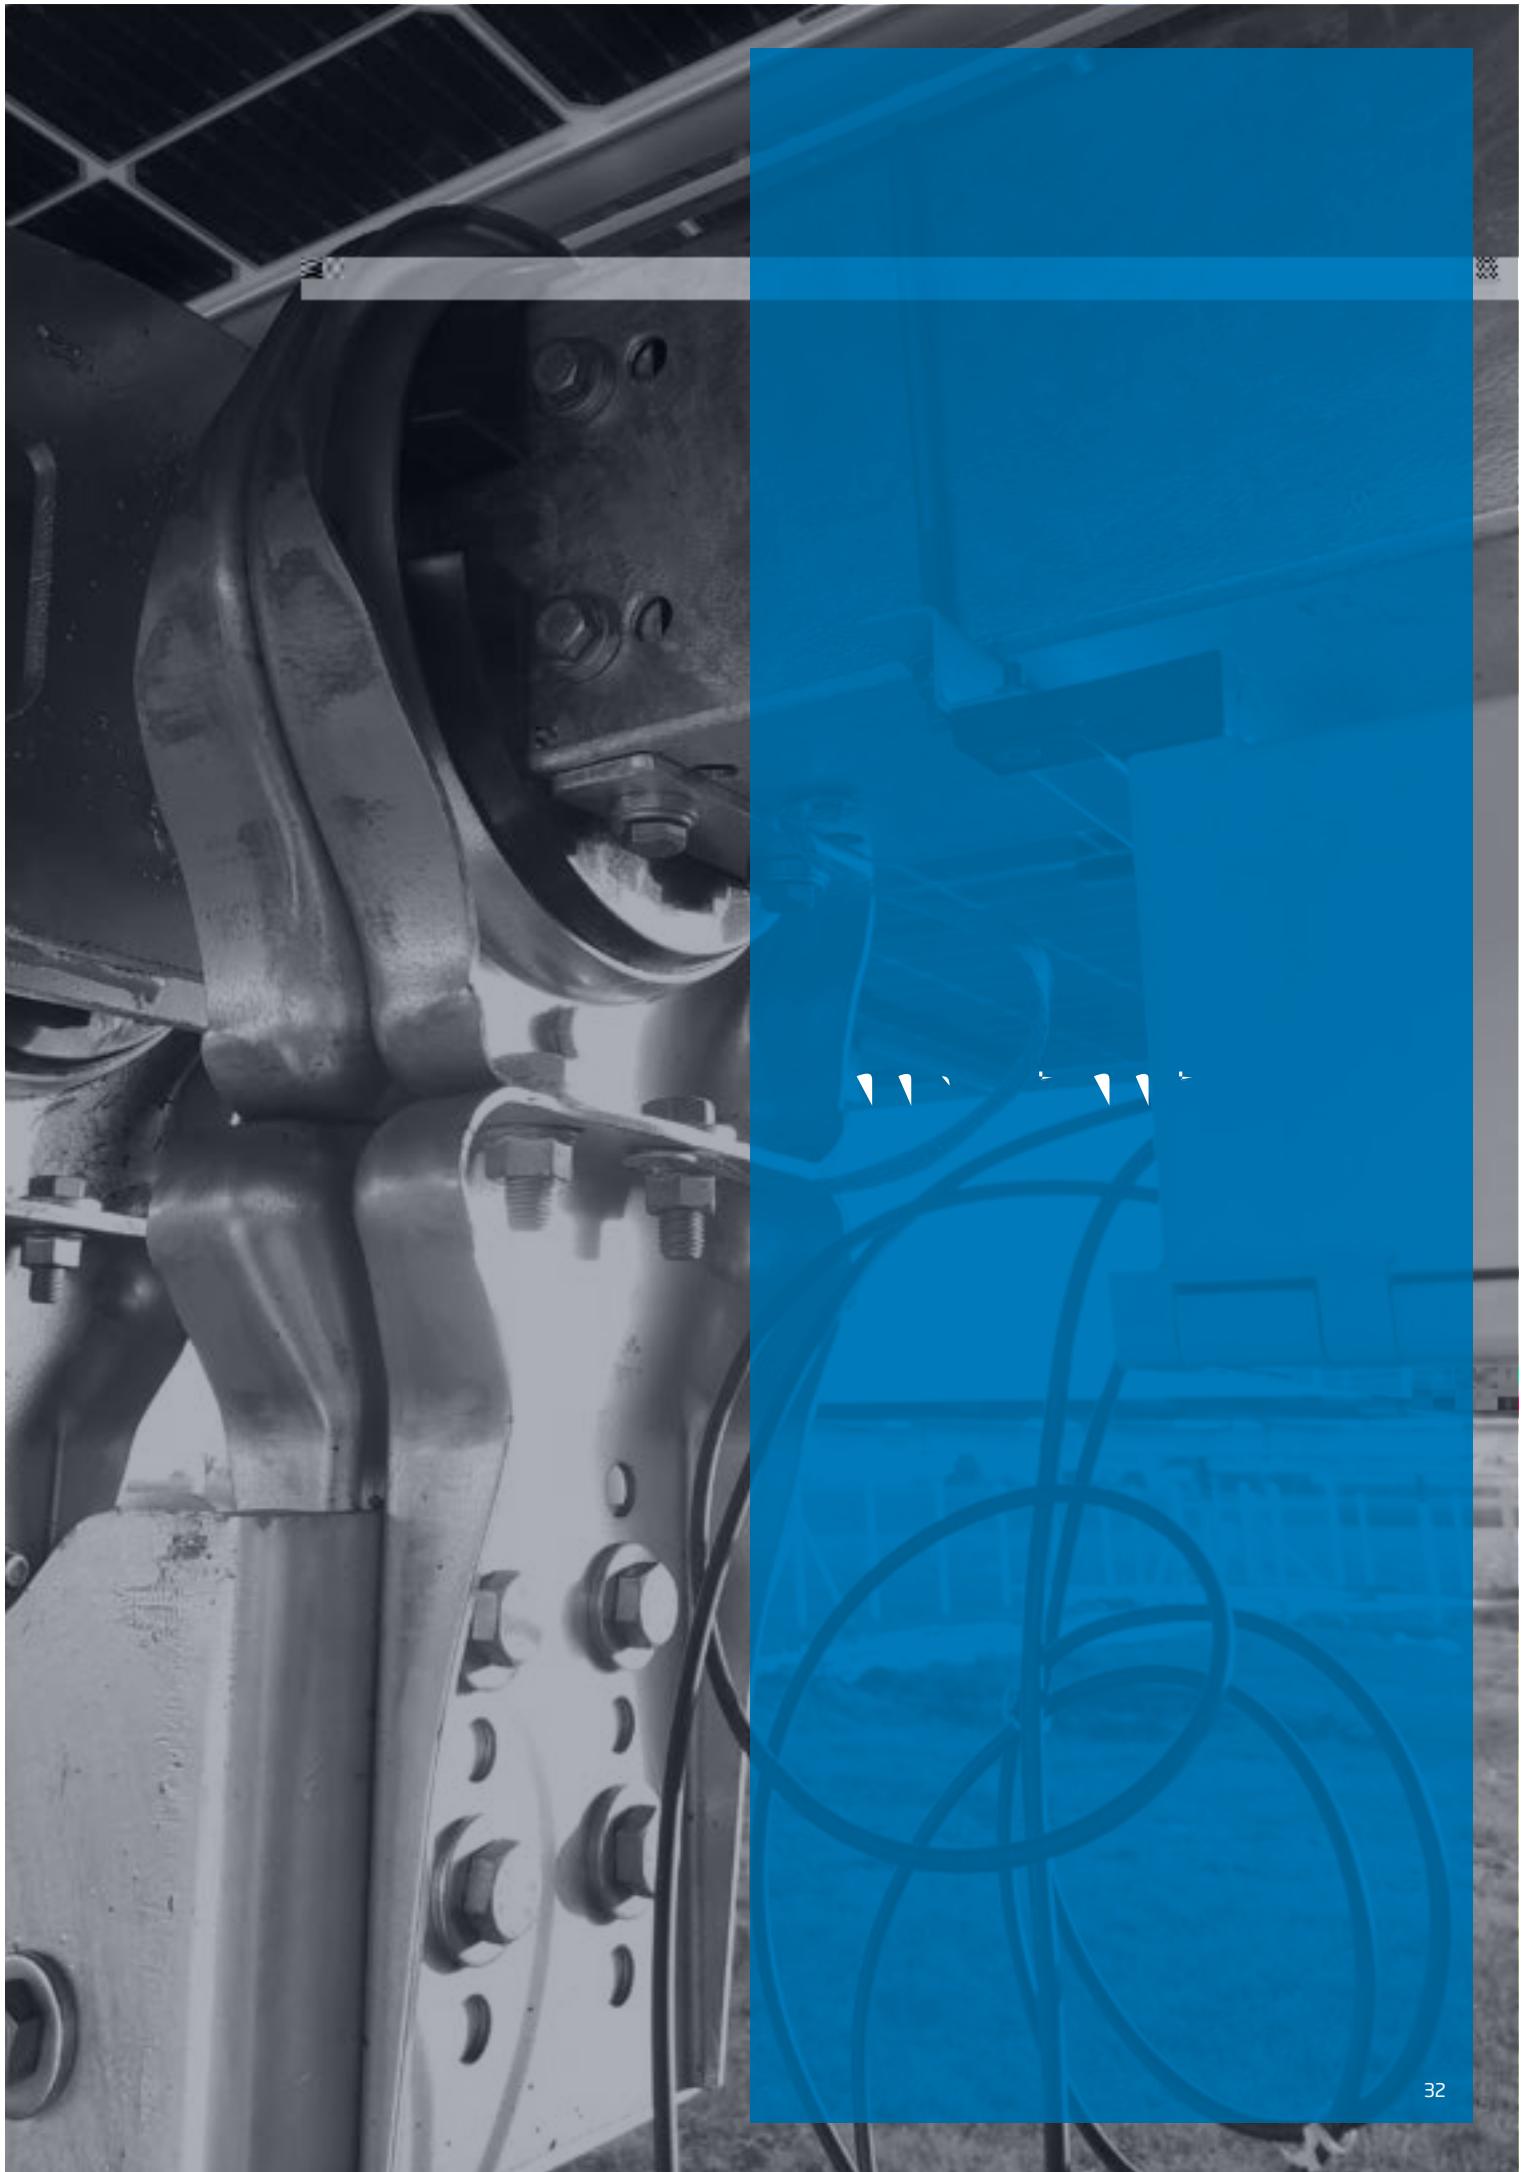



TrinaTracker has always focused on reliability, aiming its resources to continuously reduce product failure and achieve the highest and most assure long term energy outcome for our clients.

This is achieved by TrinaTracker's fanatical continually improvement of every element in the design of the company's trackers, both at component level and as holistic system upgrading every single one of its components, increasing the solar systems' reliability and decreasing failure rates precipitously.

This document aims to demonstrate the advantages of employing TrinaTracker in place of cylindrical bearings by evaluating all possible load conditions in service. The benefits have been shown from different analyses and comparisons.

Some of the main advantages summarized in this document are:



As explained here, the bearing is one of the essential parts of the tracker, and TrinaTracker is recognized worldwide as industry leading.

Hundreds of customers and our own experience confirm these benefits.



TrinaTracker roller bearing assembling example

# 10



[www.trinaenergy.com](http://www.trinaenergy.com), a business unit of [www.trina.com](http://www.trina.com) (SHA:688599), is a global solar tracker technology leader focused on providing “state-of-the-art” design solutions tailor-made to any terrain characteristics and weather conditions.

The company has more than 6GW of solar trackers deployed in 40 countries in which they accurately adapt the solar systems to each site’s features. [www.trinaenergy.com](http://www.trinaenergy.com) **1** and [www.trinaenergy.com](http://www.trinaenergy.com) stand out in the market for their reliability, optimized design and minimal operation and maintenance requirements.

The trackers’ compatibility with ultra-high power modules has been reported by [www.trinaenergy.com](http://www.trinaenergy.com). Furthermore, [www.trinaenergy.com](http://www.trinaenergy.com) **1** and [www.trinaenergy.com](http://www.trinaenergy.com) have been subjected to static, dynamic and aeroelastic loads through the most extensive tunnel test implemented in the solar industry and performed by leading wind engineering consultants, [www.trinaenergy.com](http://www.trinaenergy.com) and [www.trinaenergy.com](http://www.trinaenergy.com).


[www.trinaenergy.com](http://www.trinaenergy.com) is entirely focused on quality and innovation to provide its clients with high-technology solutions that achieve the highest energy yield and lowest costs and [www.trinaenergy.com](http://www.trinaenergy.com).

## Trina Energy

Founded in 1997, [www.trina.com](http://www.trina.com) is the world-leading PV and smart energy total solution provider. The company engages in PV products R&D, manufacture and sales; PV projects development, EPC, O&M; smart micro-grid and multi-energy complementary systems development and sales; and energy cloud-platform operation.

In 2018, [www.trina.com](http://www.trina.com) launched the Energy IoT brand, established the Trina Energy IoT Industrial Development Alliance and leading enterprises and research institutes in China and around the world and founded the New Energy IoT Industrial Innovation Center. With these actions, [www.trina.com](http://www.trina.com) is committed to working with its partners to build the energy IoT ecosystem and develop an innovation platform to explore New Energy IoT, as it strives to be a leader in global intelligent energy. In June 2020, [www.trina.com](http://www.trina.com) was listed on the STAR Market of the Shanghai Stock Exchange.

For more information, please visit [www.trinaenergy.com](http://www.trinaenergy.com).

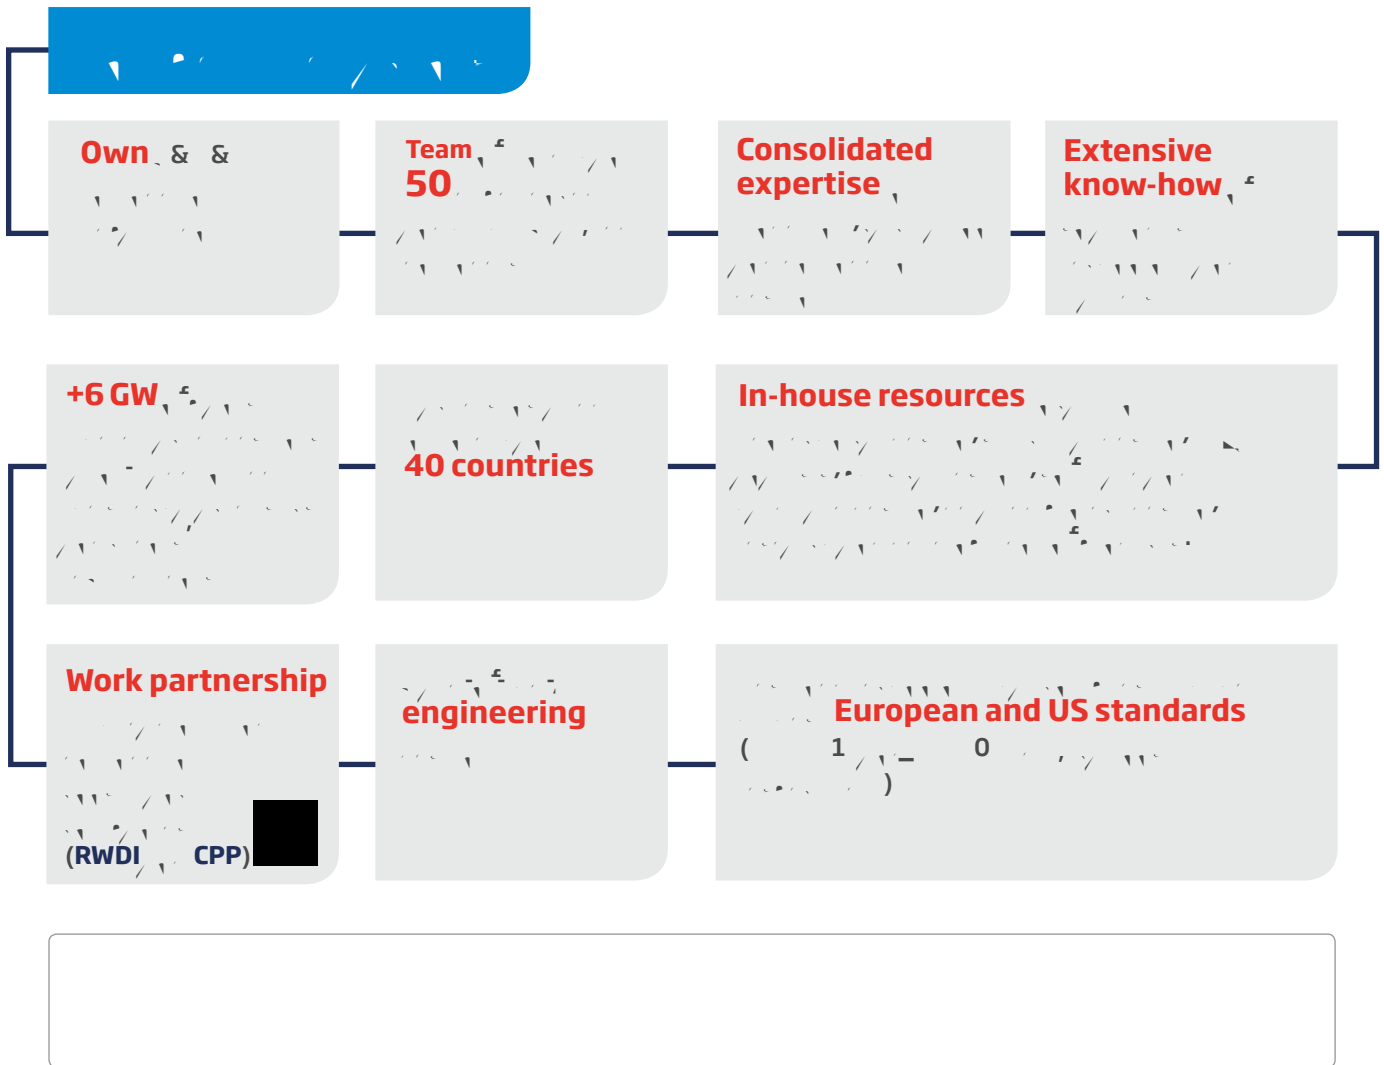




## Vanguard™ 2P



- 2P mono-crystalline silicon, 210mm x 90mm
- Module size: 2100mm x 1300mm
- 120 cells per module, 4 rows
- LIDC: 0.5%
- Form 7, 120 cells
- GCR: 30%
- Weight: 20kg
- Efficiency: 20.8%



## Agile™ 1P

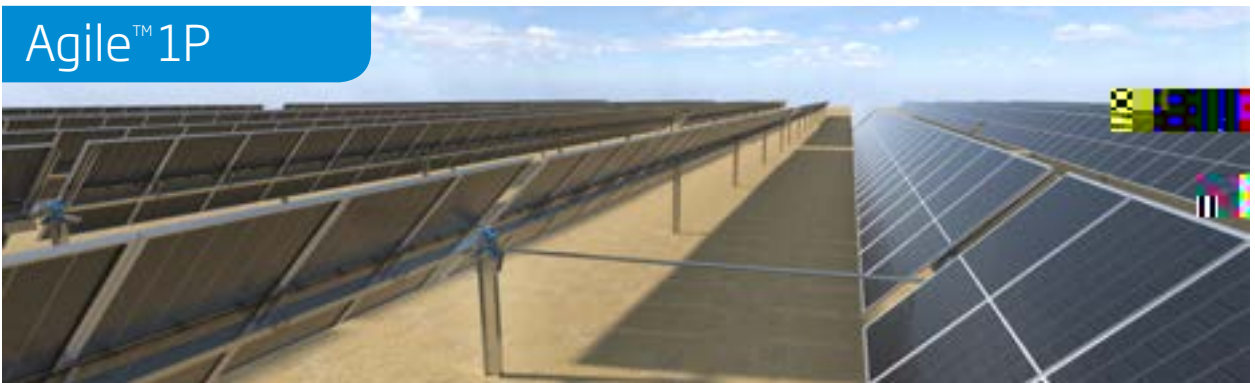

- LIDC: 0.5%
- 120 cells per module, 4 rows
- DCR: 0.5%
- Module size: 2100mm x 1300mm
- Heterojunction: 20% N-type, 10% E-type
- Weight: 20kg
- Efficiency: 20.8%



1

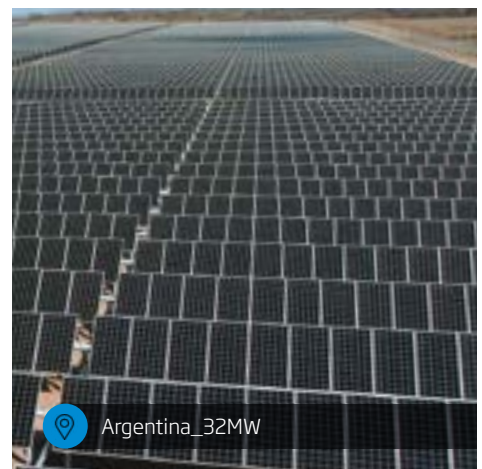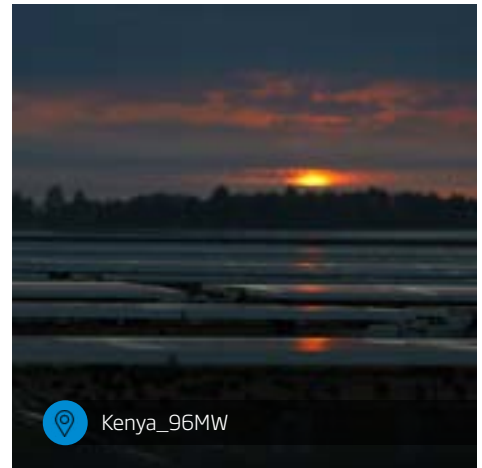



The logo for TrinaTracker, featuring the word "Trina" in blue and "Tracker" in orange, with a red dot above the 'i' in "Trina".

TrinaTracker

The logo for TrinaSolar, featuring the word "Trina" in blue and "Solar" in white, with a red dot above the 'i' in "Trina".

TrinaSolar

The logo for TrinaSolar, featuring the word "Trina" in blue and "solar" in white, with a red dot above the 'i' in "Trina".

Trinasolar