



0~+5W




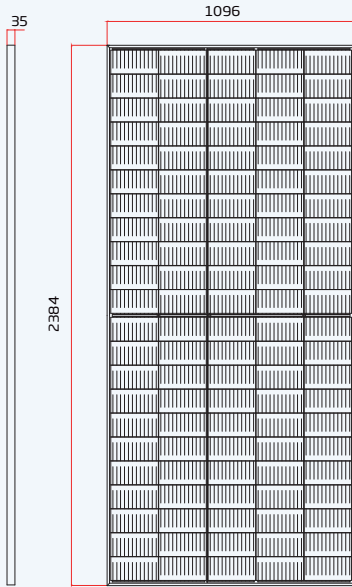

PV (545V) I-V

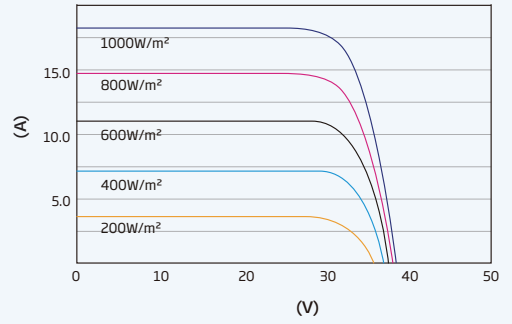

PV (545V) P-V

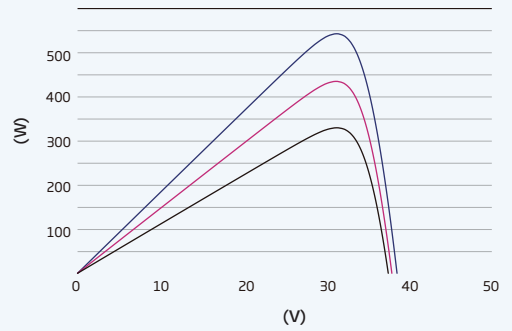

	110 セル
	2384 x 1096 x 35 mm
	28.6 kg
	3.2 mm 高透過・反射防止膜付倍強度ガラス
	EVA/POE
	ホワイト
	シルバーアルマイト処理アルミ合金35mm
	IP 68
	MC4 EV02 / TS4*

43°C (±2°C)	-40~+85°C
-0.34%/°C	1500V DC (IEC)
-0.25%/°C	1500V DC (UL)
0.04%/°C	30A