




c

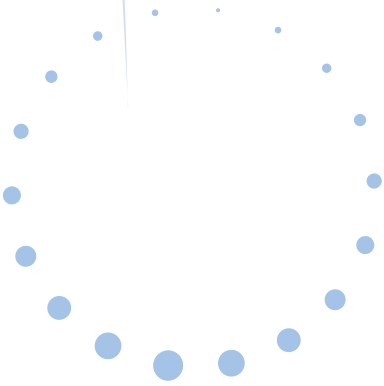

35 alö

1096

2384

7 V (A)

(W)

/8W

/BW

W)

STC (標準試験条件): 日射強度 1000W/m2, セル温度 25 °C, AM1.5. *: 測定公差 ± 3%.

(10%)

Power Bifaciality: 70~5%.

(NOCT)

MC4 EVO2 / TS4*

*Please refer to regional datasheet for specified connector.

43°C (-2°C)

-0.34%/°C

-0.25%/°C

0.04%/°C

-40~+85°C

1500V DC (IEC)

1500V DC (UL)

35A